



Address : 59-5,JungHeungRo73-Gil,Sari-Myeon,Goesan-Gun,ChungCheongBuk-Do,Korea. (P.C.: 367-821)
Tel : +82-(0)43-836-7672
Fax : +82-(0)43-836-7675
E-mail : uniontec@kita.net / ham@utmachine.com
Website : www.utmachine.com

Plastic Fuel Filter Dry Leak Tester M/C(Model : UFD-3S)



M/C MAIN PART 1




M/C MAIN PART 2



PLASTIC FUEL FILTER



MAIN TESTING ZONE

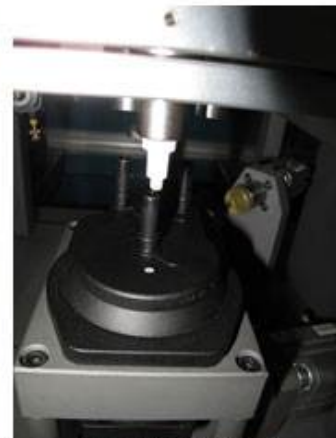

MARKING DEVICE

TECHNICAL DESCRIPTION

- MANUAL LOADING & MANUAL UNLOADING SYSTEM
- PRODUCT CAPACITY : 3~4 pcs/ min
- TEST PRESSURE : 1~3kgf/cm²
- AIR LEAK DETECTOR MODULE : ATEQ F520(FRANCE)
- DETECTION RANGE : 3CCM~5CCM
- LEAK DETECTION VALUE
 - TOTAL TEST TIME(1 CYCLE) : 45 Sec
 - RESOLUTION : 0.1pa(0.01mmH2O)
 - LEAK CHECK TIME : 30 Sec
- TOUCH PANEL : 8.4" TFT LCD MONITOR INSTALLED
- AIR REGULATOR & WATER SEPERATOR FILTER INSTALLED
- 1 SET OF JIG(FOR 3 STATION) INSTALLED
- SPECIAL MARKING DEVICE INSTALLED
- ELECTRIC POWER : 380V/ 220V x 50/ 60Hz x 2P/3P

APPLICATION

- THIS PRESSURE LEAK TESTER IS MANUFACTURED TO CHECK THE FUEL FILTER LEAKAGE FOR AN AUTOMOBILE.
- THIS MACHINE IS AVAILABLE TO CHECKING LEAKAGE OF FUEL FILTER 3CCM~5CCM BY ADOPTING HIGH QUALITY DETECTOR MODULE(ATEQ F520). OF COURSE, THE LEAKAGE CHECKING RANGE CAN BE ADJUSTED DEPEND ON COMPANY QUALITY CONTROL LEVEL(BETWEEN 1~3kgf/cm²).

OPTIONAL PAPRT

- UPPER & LOWER PARTS HOLDING JIG