




Address : 59-5,JungHeungRo73-Gil,Sari-Myeon,Goesan-Gun,ChungCheongBuk-Do,Korea. (P.C.: 367-821)
Tel : +82-(0)43-836-7672
Fax : +82-(0)43-836-7675
E-mail : uniontec@kita.net / ham@utmachine.com
Website : www.utmachine.com

Auto Dry Leak Tester M/C(Model : ULT-20DP, Passenger Type)



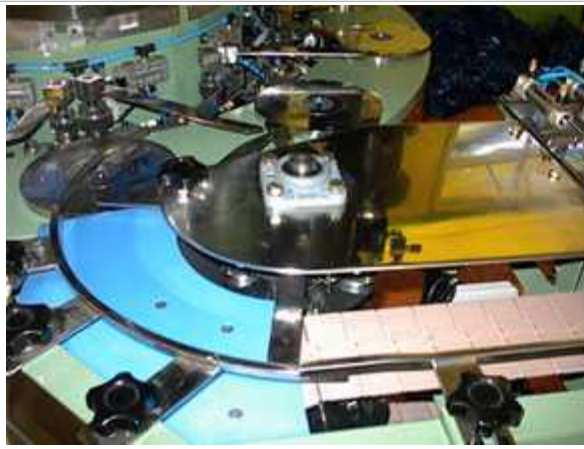

TECHNICAL DESCRIPTION

- PRODUCTION CAPACITY : 38~40 pcs/ min
- AVAILABLE TESTING OUTDIA : $\phi 60 \sim \phi 110$
- AVAILABLE TESTING HEIGHT : 60~180mm
- MAIN AIR PRESSURE : 6kgf/ cm^2
- TEST AIR PRESSURE : 4kgf/ cm^2
- TESTING CAPSULE : 20 CAPSULE
- MANUAL & AUTO FUNCTION SYSTEM
- MAN POWER : NONE
- AIR CONSUMPTION : 6.4~~l~~/ min
- TURN TABLE SPEED : 2 rpm. ONE CYCLE/ 30 sec
- LEAKAGE CHECKING RANGE : 5mmAq, over 0.5cc
- ELECTRIC POWER : 380V x 50/ 60Hz x 3P
- MACHINE SIZEA) BODY PART : W2600 x L2900 x H2200
B) CONTROL BOX : W600 x L400 x H1700
- MACHINE WEIGHT : 4,800 kg

APPLICATION

- THIS AUTO PRESSURE LEAK TESTER IS MANUFACTURED TO CHECK THE OIL FILTER LEAKAGE FOR AN AUTOMOBILE.
- THIS MACHINE IS AVAILABLE TO CHECKING LEAKAGE OF OIL FILTER OVER 0.5cc/ 10 sec(0.2cc ALSO CAN DETECT)BY ADOPTING HIGH QUALITY PRESSURE SENSOR. OF COURSE, THE LEAKAGE CHECKING RANGE CAN BE ADJUSTED DEPEND ON COMPANY QUALITY CONTROL LEVEL.

FEATURE

- TURN TABLE & PLC CONTROL SYSTEM
- FULL AUTO LOADING & UNLOADING
- AOTO SELECT & REJECT THE BAD FILTER
- CAN CHECK RUBBER PACKING CRACK AND UNFORMED DURING TEST
- AUTO ALARM SYSTEM INSTALLED

OPTIONAL PART

- LINER
- CLAMP JIG(M16)
- CAPSULE BASE PLATE
- HEIGHT CHANGE BAR
- PRESSURE SENSOR
- 3 WAY VALVE
- YOKOGAWA DISPLAY
- OTHER PNEUMETIC PARTS